

IP I/O Mapping to
VME64x
Draft Standard

VITA 4.1-199x

Draft 0.7
September 9, 1996

This standard is being prepared by the VITA Standards Organization (VSO) and is unapproved.

Do not specify or claim conformance to this document.

VSO is the Public Domain Administrator of this specification and guards the contents from change except by a sanctioned meetings of the task group under due process.

VITA Standards Organization
7825 East Gelding Drive, Suite 104
Scottsdale, AZ 85260

voice: (602) 951-8866
fax: (602) 951-0720
url: <http://www.vita.com>

TABLE OF CONTENTS

Abstract	iii
Foreword	iii
Chapter 1	1
Introduction	1
1.1 Introduction	1
1.2 Abbreviations	1
1.3 References	2
1.4 Standard Terminology	2
Chapter 2	3
I/O Signal Mappings	3
2.1 Introduction	3
2.2 Requirements	3
2.2.1 Mapping to VME64x 6U Boards.....	5
2.2.2 Observations to all tables.....	5
2.2.3 VME64x P0 and P2 Observations.....	5
2.2.4 Rules and Permissions.....	6
Chapter 3	7
Reference Figures	7
3.1 Introduction	7

List of Tables

Table 2-1	I/O Signal Mapping to VME64x P0 Connector	3
Table 2-2	I/O Signal Mapping to VME64x P2 Connector	4

List of Reference Figures

Figure 3-1	Possible IP Connector Layout on a 6U VME64x Board.....	7
------------	--	---

Do not specify or claim conformance to this document

Abstract

This draft standard defines the mapping of the 50 user defined I/O pins from the IP (ANSI/VITA 4-199x) I/O connectors to VME64x board's rear I/O connectors.

Foreword

Since the introduction of IPs in 1988, most IP I/O—like that of the VME bus—has been brought out on the board's front panel. Original VME had only 64 user defined I/O pins assigned for rear backplane I/O, and therefore was not possible to route the 200 IP I/O lines through a VME's rear backplane.

With the development of the VME64x (VME64 Extensions) Draft Standard, VITA 1.1-199x, 205 user defined I/O pin are now available for rear backplane I/O. It now is practical to route multiple IP's I/O through the VME64x backplanes. It makes sense to do this in a consistent manor across all VME64x boards, backplanes and rear I/O transition boards.

The "good fit" between the 200 (typical count) IP I/O lines and the now-available 205 backplane I/O pins motivated the three sponsors of this draft standard to create a common, recommended pin assignment to promote interchangeability and competition within the industry, with more options and lower integration cost for integrators, VARs and end-users.

In parallel to the VME64x development, the PICMG (PCI Industrial Computer Manufacturers Group), via Ziatech's initiative, made PCI into a backplane bus. This new specification is called CompactPCI. CompactPCI uses the same "Eurocard" mechanics as the VME architecture, but chose to use a 2 mm connector system, since a higher density connector is required. A similar specification, that maps 100 IP I/O lines to CompactPCI rear-panel connectors is under consideration by PICMG. However the PICMG organization and that draft specification are not related to the VSO and this draft specification. The CompactPCI mapping specification will not be discussed further in this document.

Wayne Fischer
Chair
FORCE COMPUTERS

Jerry Gipper
Vice-Chair
Motorola

Kim Rubin
Draft Editor
GreenSpring Computers

The following people were on the ANSI canvas balloting committee:

>>> List to be provided when canvas ballot is completed. <<<

Do not specify or claim conformance to this document

---- the following 7 sub-sections will not be in the final standard ----

Comments , Correction and/or Additions

Distribution of drafts is primarily via Adobe™ Acrobat™ (dot pdf) files. Note that Acrobat™ Distiller™ does not print the borders on the tables correctly. They should be solid, not dotted lines.

Anyone wishing to provide comments, corrections and/or additions to this proposed standard, please direct them to the task group draft editor.

Kim Rubin
VITA 4.1 Draft Editor
GREENSPRING COMPUTERS,
Division of SBS Technology, Inc.
181 Constitution Drive
Menlo Park CA 95025
voice: (415) 327-1200
fax: (415) 327-3808
email: kim@gspring.com

The best way to provide corrections and small additions is via marking up the specific pages and faxing them to the draft editor. For longer additions, the draft editor prefers to received just textual information via e-mail. If drawings are involved, they should be done in Microsoft MacDraw running on Macintosh based computers. This document is being prepared in Microsoft Word for Macintosh computers.

Change Bars

This is the third major published draft. All paragraphs and other items changed from the previous draft are noted with a change bar on the right side of the paragraph or item, as shown on the right side of this paragraph. One exception in this draft. All **SHALL & SHALL NOTs** changed to shall & shall not are not noted in this draft with a change bar.

Draft Summary

This is the third major publication of this draft standard. This section lists the major changes made to each draft over the previous draft.

Draft History

Draft No.	Date	Comments & Major Changes/Updates
D0.5a	June 15, 1996	First published and distributed draft
D0.6	July 18, 1996	A few editorial changes
D0.6a	July 26, 1996	Changed all SHALL & SHALL NOT words to shall and shall not
D0.7	September 9, 1996	Dropped CompactPCI pin assignments.

Issues & Concerns to be Resolved

Following are some of the issues and concerns that need to be resolved before final approval of this draft standard:

- 1) None.

Task Group Ballot

There were two major technical changes from D0.6. They are:

- (1) CompactPCI pin assignments were dropped from this document. This change means all sections, rules, figures and tables are re-numbered.
- (2) The Table showing pin assignments to VME64x P2 had the GND pins in the wrong column. The new Table 2-2—with the correct grounds—has significantly different pin assignments.

Do not specify or claim conformance to this document

Chapter 1

Introduction

1.1 Introduction

This draft standard creates standard I/O pin assignment mappings between IP Mezzanine Modules (ANSI/VITA 4-1996 IP Modules) and VME64x (VITA 1.1-199x) board's and backplane's I/O pins.

Only I/O pin numbers are considered; the signals on these I/O lines may be input or output, digital or analog, or ground.

This draft standard applies only to VME64x boards that contain one or more IP mezzanine module positions. This draft standard does not directly apply to backplanes, enclosures, IP modules, nor I/O transition boards. This draft standard may indirectly impact the design and implementation of these system components.

Two pin assignment tables make up the bulk of the technical part of this draft standard. A set of observations to assist in reading the tables, and a set of rules for implementing the tables are also provided.

In addition to specifying I/O signal pin mapping in the tables, a certain number of power pins, both +5V and +3.3V are also assigned to the user defined I/O pins. This assignment permits, within some constraints, for transition modules to be powered through the VME64x boards via the backplane I/O connectors. Detailed specifications for this power, including choice of supported voltages, tolerances, maximum current, etc. are beyond the scope of this draft standard.

For convenience, several mechanical drawings showing relevant connector pin placements are reproduced here from other standards documents.

Hot swap capability and implementation is beyond the scope of this draft standard.

Impedance, resistance, maximum current carrying capacity, and crosstalk of the traces on the VME64x boards implementing the pin assignments in this proposed standard are beyond the scope of this draft standard.

1.2 Abbreviations

The following abbreviations refer to the listed documents, above. Listed alphabetically.

2 mm connector	IEC 1076-4-101
IP	ANSI/VITA 4-1996
Original VME	ANSI/IEEE STD 1014-1987
VME64	ANSI/VITA 1-1994
VME64x	VITA 1.1-199x, VME64 Extensions Draft Standard

Do not specify or claim conformance to this document

1.3 References

The following publications as used in conjunction with this draft standard. When a document is superseded by an approved revision (including draft standards), that revision shall apply. Listed alphabetically.

ANSI/VITA 1-1994	VME64 Standard, Approved April 10, 1995
ANSI/VITA 4-1996	IP Module Standard, expected approval August 1996
IEC 1076-4-101	2 mm High Density Connector
VITA 1.1-199x	VME64 Extensions Draft Standard, Draft 1.2 June 26, 1996

1.4 Standard Terminology

To avoid confusion and to make clear the requirements for compliance, many paragraphs in this draft standard are labeled with keywords that indicate the type of information they contain. This keyword usage is consistent with other VSO standards. The keywords are listed below:

- Rule
- Recommendation
- Suggestion
- Permission
- Observation

Any text not labeled with one of these keywords describes structure or operation. It is written in either a descriptive or a narrative style. The keywords are used as follows:

Rule <chapter>.<number>:

Rules form the basic framework of the Standard. They are sometimes expressed in text form and sometimes in the form of figures, tables or drawings. All rules shall be followed to ensure compatibility between board and backplane designs. Rules are characterized by an imperative style. The upper-case words shall and shall not are reserved exclusively for stating rules in this document and are not used for any other purpose.

Recommendation <chapter>.<number>:

Wherever a recommendation appears, designers would be wise to take the advice given. Doing otherwise might result in some awkward problems or poor performance. In many cases a designer needs a certain level of experience in order to design boards that deliver top performance. Recommendations found in this standard are based on this kind of experience and are provided to designers to speed their traversal of the learning curve.

Suggestion <chapter>.<number>:

A suggestion contains advice which is helpful but not vital. The reader is encouraged to consider the advice before discarding it. Some design decisions that need to be made in designing boards are difficult until experience has been gained. Suggestions are included to help a designer who has not yet gained this experience.

Permission <chapter>.<number>:

In some cases a rule does not specifically prohibit a certain design approach, but the reader might be left wondering whether that approach might violate the spirit of the rule or whether it might lead to some subtle problem. Permissions reassure the reader that a certain approach is acceptable and will cause no problems. The upper-case word MAY is reserved exclusively for stating permissions in this document and is not used for any other purpose.

Observation <chapter>.<number>:

Observations do not offer any specific advice. They usually follow naturally from what has just been discussed. They spell out the implications of certain rules and bring attention to things that might otherwise be overlooked. They may also provide the rationale behind certain rules so that the reader understands why the rule must be followed.

Do not specify or claim conformance to this document

Chapter 2

I/O Signal Mappings

2.1 Introduction

This chapter provides the required I/O signal mappings between the IP's I/O connector and CompactPCI's and VME64x rear I/O connectors.

2.2 Requirements

2.2.1 Mapping for VME64x 6U Boards

Rule 2.1:

VME64x 6U boards containing IPs and conforming to this draft standard shall provide IP I/O signal routing to the rear backplane connector as listed in Tables 2-1 and 2-1.

2-1 Table
I/O Signal Mapping to VME64x P0 Connector

Connector	Position	Row						
		f	e	d	c	b	a	
P0	1	GND	D5	D4	D3	D2	D1	IP-D
P0	2	GND	D10	D9	D8	D7	D6	IP-D
P0	3	GND	D15	D14	D13	D12	D11	IP-D
P0	4	GND	D20	D19	D18	D17	D16	IP-D
P0	5	GND	D25	D24	D23	D22	D21	IP-D
P0	6	GND	D30	D29	D28	D27	D26	IP-D
P0	7	GND	D35	D34	D33	D32	D31	IP-D
P0	8	GND	D40	D39	D38	D37	D36	IP-D
P0	9	GND	D45	D44	D43	D42	D41	IP-D
P0	10	GND	D50	D49	D48	D47	D46	IP-D
P0	11	GND	C5	C4	C3	C2	C1	
P0	12	GND	C10	C9	C8	C7	C6	IP-C
P0	13	GND	C15	C14	C13	C12	C11	IP-C
P0	14	GND	C20	C19	C18	C17	C16	IP-C
P0	15	GND	C25	C24	C23	C22	C21	IP-C
P0	16	GND	C30	C29	C28	C27	C26	IP-C
P0	17	GND	C35	C34	C33	C32	C31	IP-C
P0	18	GND	C40	C39	C38	C37	C36	IP-C
P0	19	GND	C45	C44	C43	C42	C42	IP-C

Do not specify or claim conformance to this document

2-2 Table
I/O Signal Mapping to VME64x P2 Connector

<i>Connector</i>	<i>Position</i>	<i>Row</i>			
		d	c	a	z
P2	1	C47	B42	B41	C46
P2	2	C48	B44	B43	GND
P2	3	C50	B46	B45	C49
P2	4	B1	B48	B47	GND
P2	5	B3	B50	B49	B2
P2	6	B4	A2	A1	GND
P2	7	B6	A4	A3	B5
P2	8	B7	A6	A5	GND
P2	9	B9	A8	A7	B8
P2	10	B10	A10	A9	GND
P2	11	B12	A12	A11	B11
P2	12	B13	A14	A13	GND
P2	13	B15	A16	A15	B14
P2	14	B16	A18	A17	GND
P2	15	B18	A20	A19	B17
P2	16	B19	A22	A21	GND
P2	17	B21	A24	A23	B20
P2	18	B22	A26	A25	GND
P2	19	B24	A28	A27	B23
P2	20	B25	A30	A29	GND
P2	21	B27	A32	A31	B26
P2	22	B28	A34	A33	GND
P2	23	B30	A36	A35	B29
P2	24	B31	A38	A37	GND
P2	25	B33	A40	A39	B32
P2	26	B34	A42	A41	GND
P2	27	B36	A44	A43	B35
P2	28	B37	A46	A45	GND
P2	29	B39	A48	A47	B38
P2	30	B40	A50	A49	GND
P2	31	GND	3V	3V	3V
P2	32	VPC	5V	5V	GND

Do not specify or claim conformance to this document

2.2.2 Observations to all Tables

Observation 2.1:

Each table is organized to visually mimic the named physical backplane connector of the VME64x board. The visual rows and columns of the table correspond to the industry convention for naming the connector pin rows and the connector pin positions, respectively. Each entry in the table names the IP position and its I/O pin number that is electrically connected via traces on the VME64x board to the corresponding backplane pin in the table.

Pin positions for VME64x backplane connectors mounted on the VME64x board consist of a connector (**P1**, **P2** or **P0**), a lower-case **row** letter (**z**, **a**, **b**, **c**, **d** or **e**) and a **position** number (**1..32** or **1..19**).

The table entries in the form **A1**, **A2...D49**, **D50** refer to IP positions A through D and their respective IP I/O pin numbers 1 through 50.

Observation 2.2:

GND in a table entry for row f for 2 mm connectors means the board's ground plane, connected to the connector's ground shield.

GND in a table entry for VME64x P2 connector means the board's ground plane, connected to the connector's associated pin.

+5V means the +5 volt power plane, connected to the pins on the connector via the board. This +5 volt power must be connected to the system backplane +5 volt pins.

+3.3V means the +3.3 volt power plane, connected to the pins on the connector via the board. This +3.3 volt power must be connected to the system backplane +3.3 volt power pins.

Note that although the +5V and +3.3V pins are provided in this draft standard in order to power I/O transition boards, that different permitted system configurations may or may not actually provide power via these lines.

Observation 2.3:

key means the physical keying location per the 2 mm connector standard. See the CompactPCI Specification for details on the keying combinations.

2.2.3 VME64x P0 and P2 Notes

Observation 2.4:

If only P0 is available for IP I/O, then all of IP-D and nearly all of IP-C [pins 1..45] I/O lines may be routed to P0 pins only.

Observation 2.5:

If rows **a** and **c** of P2 are used for another function, then all of IP-D, all of IP-C and most of IP-B [pins 1..40] I/O lines may be routed to available backplane pins.

Observation 2.6:

The pin assignment of IP-A matches the pin assignment in two rows of original 50-pin flat ribbon cable. This assignment may be useful for optimizing signal to noise or crosstalk for some products.

Observation 2.7:

The **GND** and **VPC** table entries in **Row z**, and the **GND** table entries in **Row d** are part of the VME64x Draft Standard.

Do not specify or claim conformance to this document

2.2.4 Rules and Permissions

Rule 2.2:

VME64x boards conforming to this draft standard shall use the pin assignments given in the relevant tables.

Rule 2.3:

VME64x boards conforming to this draft standard shall use the connector pin and IP position conventions contained in the underlying relevant Standards (identified in the other documents section above).

Rule 2.4:

VME64x boards conforming to this draft standard containing four IP positions shall label them A, B, C, and D.

Permission 2.1:

Boards containing fewer than four IP positions are given permission to select a subset of {A, B, C, D}. However for each labeled IP position, its I/O lines must connect to the corresponding labeled pins in the tables.

Observation 2.8:

This Rule says that an IP Carrier Board may have any number of IPs, but that the labels shall still correspond to the labels contained in these tables. In practice, this may mean that the IP label is dictated by the choice of which backplane connectors are used for IP I/O.

Rule 2.5:

VME64x boards conforming to this draft standard shall connect +5 volt system power and +3.3 volt system power to the identified pins in the tables.

Rule 2.6:

VME64x boards that implement a subset of the pin assignments given in this draft standard (except as provided in Rule 2.4 and Permission 2.2) shall NOT claim conformance to this draft standard UNLESS it is clearly stated, in every relevant place, "COMPLIANT with a SUBSET of VITA 4.1-199x Pin Assignments." The word, "SUBSET," shall be capitalized.

Permission 2.2:

Fuses or similar protection devices are permitted in the +5 and +3.3 power lines. The power is permitted to be switched, as well as protected, if desired.

Permission 2.3:

VME64x boards conforming to this draft standard may use P2 rows **a** and **c** for purposes other than IP I/O pin assignment.

Permission 2.4:

IP pins may be connected to other connectors, or to other electronics on the IP Carrier Board, besides those given in this draft standard.

Permission 2.5:

Any subset or all IP I/O pins may be mechanically or electrically disconnectable from the corresponding backplane pin provided that the default condition is connected.

Do not specify or claim conformance to this document

Chapter 3

Reference Figures

3.1 Introduction

Figure 3-1 illustrates a possible layout and orientation of the IP I/O connectors on a VME64x board. The figure is not to scale, and does not show required positions. They show only the IP I/O connectors, not the IP Logic connectors. The view is the normal, component side view of the VME64x board, with the backplane on the right and the front panel not shown on the left.

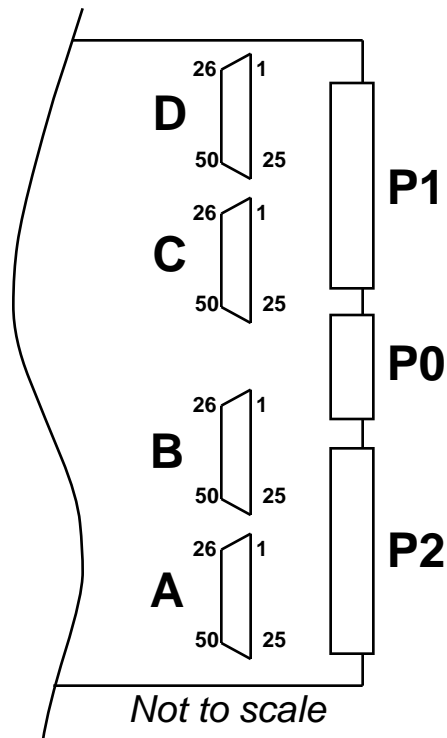


Figure 3-1 Possible IP Connector Layout on a 6U VME64x Board

Do not specify or claim conformance to this document