


# cPCI-3510(BL) Series

## 3U CompactPCI 4th/5th Generation Intel® Core™ i7 Processor Blade with ECC

### Features

- Quad-core 4th/5th Generation Intel® Core™ i7 processor
- Up to 8GB DDR3L ECC soldered memory onboard (up to 16GB for cPCI-3510BL)
- Up to three independent displays
- System/Peripheral slot operation
- Intel® AMT 9.0 support

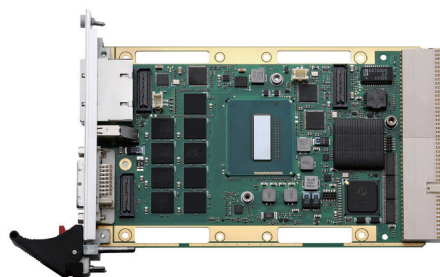

CompactPCI®



cPCI-3510(BL) cPCI-3510(BL)D cPCI-3510(BL)G cPCI-3510L cPCI-3510M cPCI-3510T

### Specifications

#### Processor & System

CPU	<p><b>New</b> Quad-core Intel® Core™ i7-5700EQ Processor 2.6GHz (Turbo boost up to 3.4GHz), 6M Cache, 47/37W by cTDP (cPCI-3510BL only)</p> <p>Quad-core Intel® Core™ i7-4700EQ Processor 2.4GHz (Turbo boost up to 3.4GHz), 6M Cache, 47/37W by cTDP</p> <p>Dual-core Intel® Core™ i5-4402E Processor 1.6GHz (Turbo boost up to 2.7GHz), 3M Cache, 25W</p> <p>Supports Intel® Hyper-Threading and Turbo Boost Technology, VT-x, VT-D, vPro Technology</p>
Chipset	Intel® QM87 Chipset
Memory	<p>DDR3L-1333 SDRAM ECC soldered, up to 16GB (cPCI-3510BL)</p> <p>DDR3L-1600 SDRAM ECC soldered, up to 8GB (cPCI-3510)</p>
BIOS	AMI EFI BIOS, 64Mbit SPI Flash memory
CompactPCI Bus	<p>PCI 32-bit, 33/66 MHz, 3.3V or 5V universal V (I/O)</p> <p>Supports operation in system slot as master or in peripheral slot as stand-alone blade without connectivity to CompactPCI® bus (Satellite mode)</p>
PICMG Standards	<p>PICMG 2.0 CompactPCI R3.0</p> <p>PICMG 2.1 Hot Swap R2.0</p> <p>PICMG 2.9 System Management (R1.0)</p>

#### Connectivity

PMC/XMC	Optional PCI 64-bit/66MHz PMC site or PCIe x1 XMC site
Ethernet	<p>One Intel® I217LM controller for one Gigabit Ethernet front panel port with Intel® AMT 9.0 support</p> <p>Three Intel® I210 controllers for one Gigabit Ethernet front panel port and two rear ports</p> <p>Additional two Intel® 82574L controllers for two Gigabit Ethernet front panel ports on riser card (cPCI-3510L/cPCI-3510T)</p>
Graphics	<p>Integrated in Intel® processor, 3D engine</p> <p>One DVI-I (digital+analog) port on front panel, analog switchable to rear, supports up to QXGA 2048x1536 pixels@75Hz, 32-bits</p> <p>Two DisplayPorts on riser card, support up to 2560x1440 pixels @60Hz, DVI, VGA and HDMI interfaces are available by adapter cables (cPCI-3510(BL)G only)</p> <p>Three independent displays with different /contents</p>

USB	<p>Single USB 3.0 port on front panel, and up to three USB ports on front panel on selected SKUs</p> <p>Three USB ports to rear, two on RTM panel</p>
Audio	Line-in and Line-out ports on front panel (cPCI-3510(BL) D only)
PS/2	Keyboard/Mouse on cPCI-3510(BL)D and cPCI-3510(BL)G
Serial Port	<p>Up to four serial ports</p> <p>One RS-232/422/485 selectable port on front panel (cPCI-3510(BL)D/cPCI-3510L/cPCI-3510T)</p> <p>One RS-232/422/485 10-pin header on riser card (cPCI-3510(BL) G only)</p> <p>Two serial ports on rear panel: one with Tx/Rx signal only, one converted from USB signal</p>
Storage	<p>One SATA 6 Gb/s direct connector for 2.5" onboard HDD (8HP &amp; 12HP version only)</p> <p>CFast socket or mSATA socket</p> <p>Optional onboard 32GB SSD (by replacing CFast adapter board)</p>
RTM	<p>Three 7-pin SATA signal connectors</p> <p>Supports SATA RAID 0/1/5/10</p>

#### Operating System

OS	<p>Microsoft Windows 7/8, 32/64-bit</p> <p>Red Hat Enterprise Linux 6.4</p> <p>Fedora 18</p> <p>Wind River VxWorks 6.9, 32/64-bit (Please contact ADLINK for other OS support)</p>
----	--



Ehlbeek 15a  
 30938 Burgwedel  
 fon 05139-9980-0  
 fax 05139-9980-49  
[www.powerbridge.de](http://www.powerbridge.de)  
[info@powerbridge.de](mailto:info@powerbridge.de)

# Specifications

## Miscellaneous

LEDs	Power, WDT, Storage Drive, Overheat, General Purpose
Battery	Coin cell lithium battery onboard for RTC CMOS RAM for BIOS configuration
Watchdog Timer	System Reset and NMI, with Programmable Interval, 1-65535 sec or 1-65535 minutes
Hardware Monitor	Monitors CPU temperature, system temperature and DC voltages by IPMI
TPM	Atmel TPM AT97SC3204 (optional support upon request)

## Mechanical & Environmental

Form Factor	3U 4HP/8HP/12HP CompactPCI 100mm x 160mm (L x W)
Operating Temperature	-20°C to +70°C (Core™ i7-4700EQ and i7-5700EQ 47W) -40°C to +85°C (screened, Core™ i5-4402E, Core™ i7-4700EQ and i7-5700EQ 47W adjusted to 37W by Intel® cTDP)
Storage Temperature	-50°C to +100°C
RH Humidity	95% non-condensing
Shock	20G peak-to-peak, 11ms duration, operating
Vibration	2Grms random vibration, 5 to 500Hz in 3 axes, operating
Weight	Net weight 713.55g (cPCI-3510(BL)D with heatsink) Net weight 718.20g (cPCI-3510(BL)G with heatsink)
Certifications	CE/ FCC

## I/O Table

		GbE	USB	COM	Display	PS/2 KB/MS	Storage	Onboard SSD	Audio	PMC/XMC
<b>SBC</b>										
cPCI-3510(BL) (4HP)	Faceplate	2 (RJ-45)	1 (3.0)		1 (DVI-I)			1 (CFast)	optional <sup>(2)</sup>	
	Onboard									
cPCI-3510(BL)D (8HP)	Faceplate	2 (RJ-45)	1 (3.0) 2 (2.0)	1 (DB9)	1 (DVI-I)	1				
	Onboard						1 (SATA) 1 (CFast)	optional <sup>(2)</sup>	1 (Line-in) 1 (Line-out)	
cPCI-3510(BL)G (8HP)	Faceplate	2 (RJ-45)	1 (3.0) 1 (2.0)	1 (RJ-45)	1 (DVI-I) 2 (DP)	1				
	Onboard			1 (10-pin)			1 (SATA) 1 (CFast)	optional <sup>(2)</sup>		
cPCI-3510L (8HP)	Faceplate	4 (RJ-45)	1 (3.0) 1 (2.0)	1 (DB9)	1 (DVI-I)					
	Onboard						1 (SATA) 1 (CFast)	optional <sup>(2)</sup>		
cPCI-3510M (8HP)	Faceplate	2 (RJ-45)	1 (3.0) 2 (2.0)	2 (DB9)	1 (DVI-I) 2 (DVI-D)	1			1 (Line-in) 1 (Line-out)	
	Onboard						1 (SATA) 1 (CFast)	optional <sup>(2)</sup>		
cPCI-3510P (12HP)	Faceplate	2 (RJ-45)	1 (3.0) 2 (2.0)	1 (DB9)	1 (DVI-I)	1			1 (Line-in) 1 (Line-out)	
	Onboard						1 (SATA) 1 (CFast)	optional <sup>(2)</sup>		1
cPCI-3510S (8HP)	Faceplate	2 (RJ-45)	1 (3.0)		1 (DVI-I)					
	Onboard							optional <sup>(2)</sup>		1
cPCI-3510T (8HP)	Faceplate	2 (RJ-45) 2 (M12)	1 (3.0)	1 (DB9)	1 (DVI-I)					
	Onboard						1 (SATA) 1 (CFast)	optional <sup>(2)</sup>		
<b>RTM</b>										
cPCI-R3P00(T)	Faceplate	2 (RJ-45)	2 (2.0)	2 (DB9)	1 (VGA) <sup>(1)</sup>					
	Onboard						3 (SATA)			

(1) Switched from front port

(2) Available by replacing CFast or mSATA board with onboard SSD adapter board

## Ordering Information

### Processor Blades

cPCI-3510BL/5700E/M16/S32 <b>New</b>	1-slot (4HP) 3U CompactPCI blade with Intel® Core™ i7-5700EQ processor and 16GB DDR3L-1333 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0 and onboard 32GB SSD
cPCI-3510/4700E/M8/S32	1-slot (4HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 8GB DDR3L-1600 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0 and onboard 32GB SSD
cPCI-3510BLD/5700E/M16 <b>New</b>	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-5700EQ processor and 16GB DDR3L-1333 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0, COM, 2x USB 2.0, PS/2 KB/MS, Line-in, Line-out, CFast socket and SATA connector
cPCI-3510D/4700E/M4	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 4GB DDR3L-1600 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0, COM, 2x USB 2.0, PS/2 KB/MS, Line-in, Line-out, CFast socket and SATA connector
cPCI-3510BLG/5700E/M16 <b>New</b>	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-5700EQ processor and 16GB DDR3L-1333 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0, RJ-45 COM, 2x DisplayPort, PS/2 KB/MS, 1x USB 2.0, CFast socket and SATA connector
cPCI-3510G/4700E/M4	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 4GB DDR3L-1600 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0, RJ-45 COM, 2x DisplayPort, PS/2 KB/MS, 1x USB 2.0, CFast socket and SATA connector
cPCI-3510L/4700E/M4	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 4GB DDR3L-1600 ECC soldered memory, DVI, 4x GbE, 1x USB 3.0, 1x USB 2.0, COM, CFast socket and SATA space
cPCI-3510M/4700E/M4 (available by request)	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 4GB DDR3L-1600 ECC soldered memory, 3x DVI, 2x GbE, 1x USB 3.0, 2x USB 2.0, 2x COM, PS/2 KB/MS, Line-in, Line-out, CFast socket and SATA connector
cPCI-3510P/4700E/M4 (available by request)	3-slot (12HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 4GB DDR3L-1600 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0, COM, 2x USB 2.0, PS/2 KB/MS, Line-in, Line-out, CFast socket, SATA connector and PMC/XMC connector
cPCI-3510S/4700E/M4	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 8GB DDR3L-1600 ECC soldered memory, DVI, 2x GbE, 1x USB 3.0, CFast socket and PMC/XMC connector
cPCI-3510T/4700E/M4 (available by request) <b>New</b>	2-slot (8HP) 3U CompactPCI blade with Intel® Core™ i7-4700EQ processor and 4GB DDR3L-1600 ECC soldered memory, DVI, 1x USB 3.0, 2x GbE in RJ-45 and 2x GbE in MIL-STD M12 connectors, COM (RS-232/422/485), CFast socket and SATA space

### Rear Transition Module

cPCI-R3P00	8 HP Rear I/O module with 2x GbE, 2x COM, 2x USB 2.0, 3x SATA connectors, VGA, 50mm depth
cPCI-R3P00T	8 HP Rear I/O module with 2x GbE, 2x COM, 2x USB 2.0, 3x SATA connectors, VGA, 80mm depth

### Accessories

SATA drive installation kit	2.5" SATA drive installation package including bracket, screws
Y-cable for keyboard & mouse	Y-cable for keyboard & mouse and 200mm in cable length
DisplayPort to DVI cable	DisplayPort to DVI adapter cable with 150mm cable (one is included in cPCI-3510(BL)G package by default)
DisplayPort to VGA cable	DisplayPort to VGA adapter cable with 150mm cable
DisplayPort to HDMI cable	DisplayPort to HDMI adapter cable with 150mm cable
RJ-45 to DB9 cable (cPCI-3510(BL)G only)	RJ-45 to DB9 COM adapter and 200mm in cable length
SCSI 100p to IO cable (cPCI-3510M only and available by request)	SCSI 100-pin male to 2 x DVI-D female, 2 x DB9 male, 2 x USB female, 2 x PS/2 female, 2 x audio jack, 150 mm cable

Contact us for different CPU, memory, SSD/HDD, CFast and mSATA combinations.

